

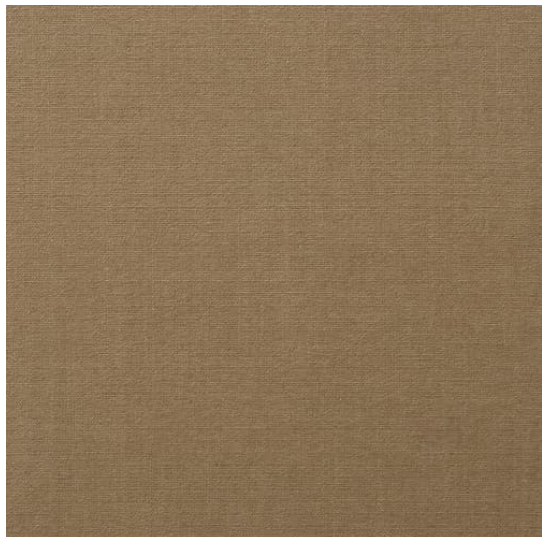


Image depicts 12x12 inch section.

© 2024 Wolf-Gordon Inc. All Rights Reserved

## Fraser CONCRETE

Category: Upholstery

Material: Polyester/Polyester Blend

### Physical Properties

---

Content: 85% Polyester  
15% Linen

Finish: Spill- and stain-resistant treatment

Backing: Styrene-butadiene Rubber

Width: 54"

Weight: 16.00 oz per linear yards

### Performance

---

Flame Resistance: Passes Cal TB 117-2013, AB 2998 compliant -  
Passes NFPA 260/UFAC

Wet and Dry Crocking: Passes AATCC 8 - Dry: Grade 4.5; Wet: Grade 4.5

Breaking Strength: ASTM D5034 - Warp: 245 lbs; Weft: 55 lbs

Seam Slippage: ASTM D4034 - Warp: 56.5 lbs; Weft: 69.7 lbs

Abrasion: 100,000 double rubs, Wyzenbeek

Tear Strength: ASTM D2261 - Warp: 23.2 lbs; Weft: 11.0 lbs

Pilling: ASTM D3511 (Brush Pill) - Grade 5

Colorfastness to Light: Passes AATCC 16 - Grade 4 @ 40 hours

Cleaning Code: S = Clean only with a water-free dry cleaning solvent

### Sustainability

---

Free of halogenated flame retardants, lead, phthalates (BBP, DBP, DEHP, DIDP, DINP, DnHP, DnOP), solvents

Printed with solvent-free inks