

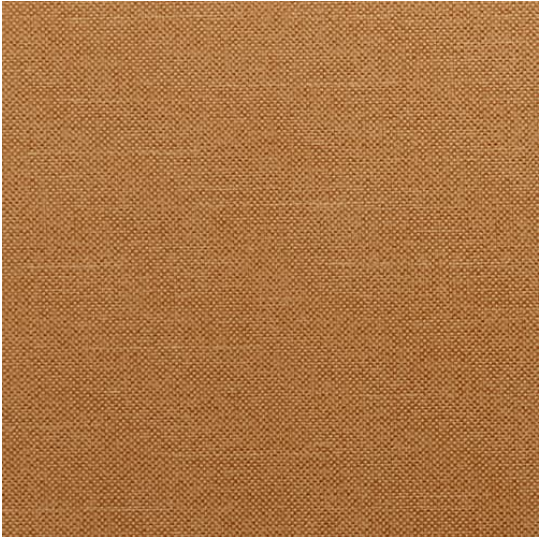


Image depicts 12x12 inch section.

© 2024 Wolf-Gordon Inc. All Rights Reserved

Belize
CLAY

Category: Upholstery

Material: Vinyl

Physical Properties

Content: 100% Vinyl

Finish: PFAS-free spill- and stain-resistant treatment

Backing: Polyester Knit

Width: 54"

Weight: 30.00 oz per linear yards

Performance

Flame Resistance: Passes Cal TB 117-2013, AB 2998 compliant - Passes NFPA 260/UFAC

Wet and Dry Crocking: Passes AATCC 8 - Dry: Grade 4; Wet: Grade 4.5

Breaking Strength: ASTM D751 - Warp: 5.6 lbs; Weft: 5.9 lbs

Abrasion: 100,000 double rubs, Wyzenbeek

Coating Adhesion: ASTM D751 - Warp: 3.3 lbs; Weft: 3.3 lbs

Seam Strength: ASTM D751- Warp: 46.0 lbs; Weft: 35.0 lbs

Colorfastness to Light: Passes AATCC 16 - Grade 5 @ 1000 hours

Cleaning Code: W-S = Clean with either a water- or solvent-based agent; a diluted bleach solution can be used

Sustainability

Free of BPA, conflict minerals, formaldehyde, lead, phthalates (BBP, DBP, DEHP, DIDP, DINP, DnHP, DnOP), solvents

Printed with solvent-free inks